	DATE	BY
DWN.	07/10/03	S.HUGGINS
DET.		
CKD.		

LTR	REVISIONS

DWG.NO. -

PART NO. **F11-ASSY**

Wall anchors will be supplied in the field due to unknown wall material and conditions.

Slotted piece and decorative strip (not shown) is held in with anchor screw.

Screw wood or concrete anchor screw thru existing hole in upright assembly

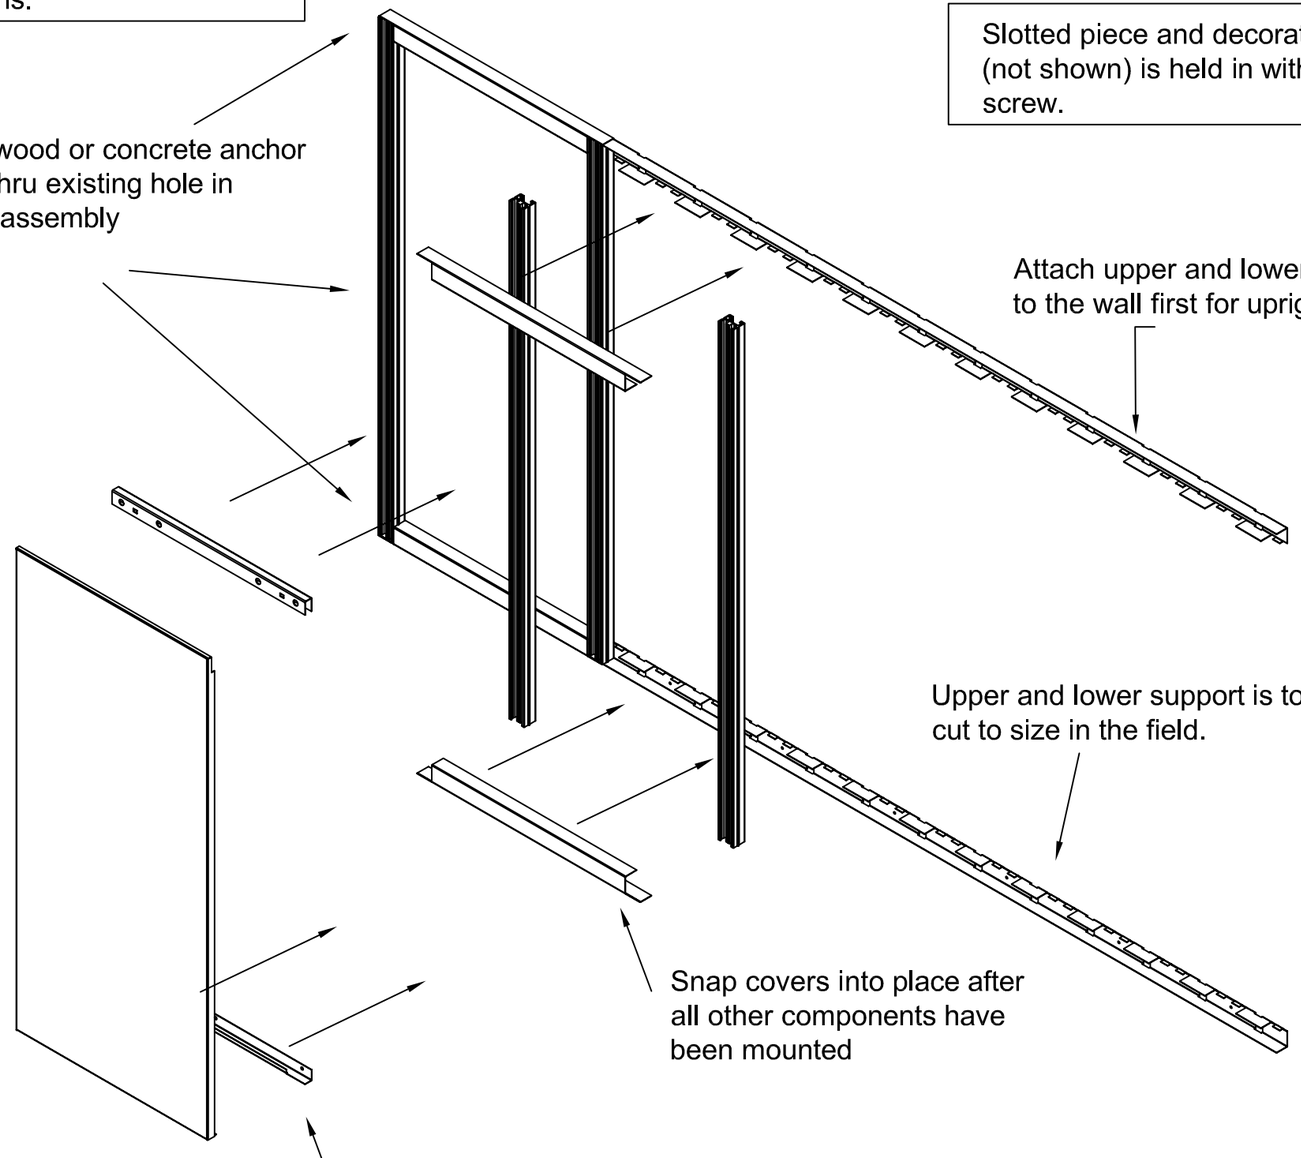

Attach upper and lower supports to the wall first for upright alignment

Upper and lower support is to be cut to size in the field.

Snap covers into place after all other components have been mounted

SCREW IN PANEL SUPPORT BRACKET AS SHOWN

TOLERANCES	SIZE	TITLE 1 ’’ WALL ASSY	
ALL FRACTION DIM ±1/64”			
ALL DECIMAL DIM ±.015”	MATERIAL AS SHOWN	PART NO. **F11-ASSY**	REV.LTR.
ALL ANGLES ±1/2˚	SCALE	DWG.NO. -	–
UNLESS OTHERWISE SPECIFIED			

FILE : LPRTSHT.DWG 11/9/90